


Corner Reflector X2 14 dB Gain

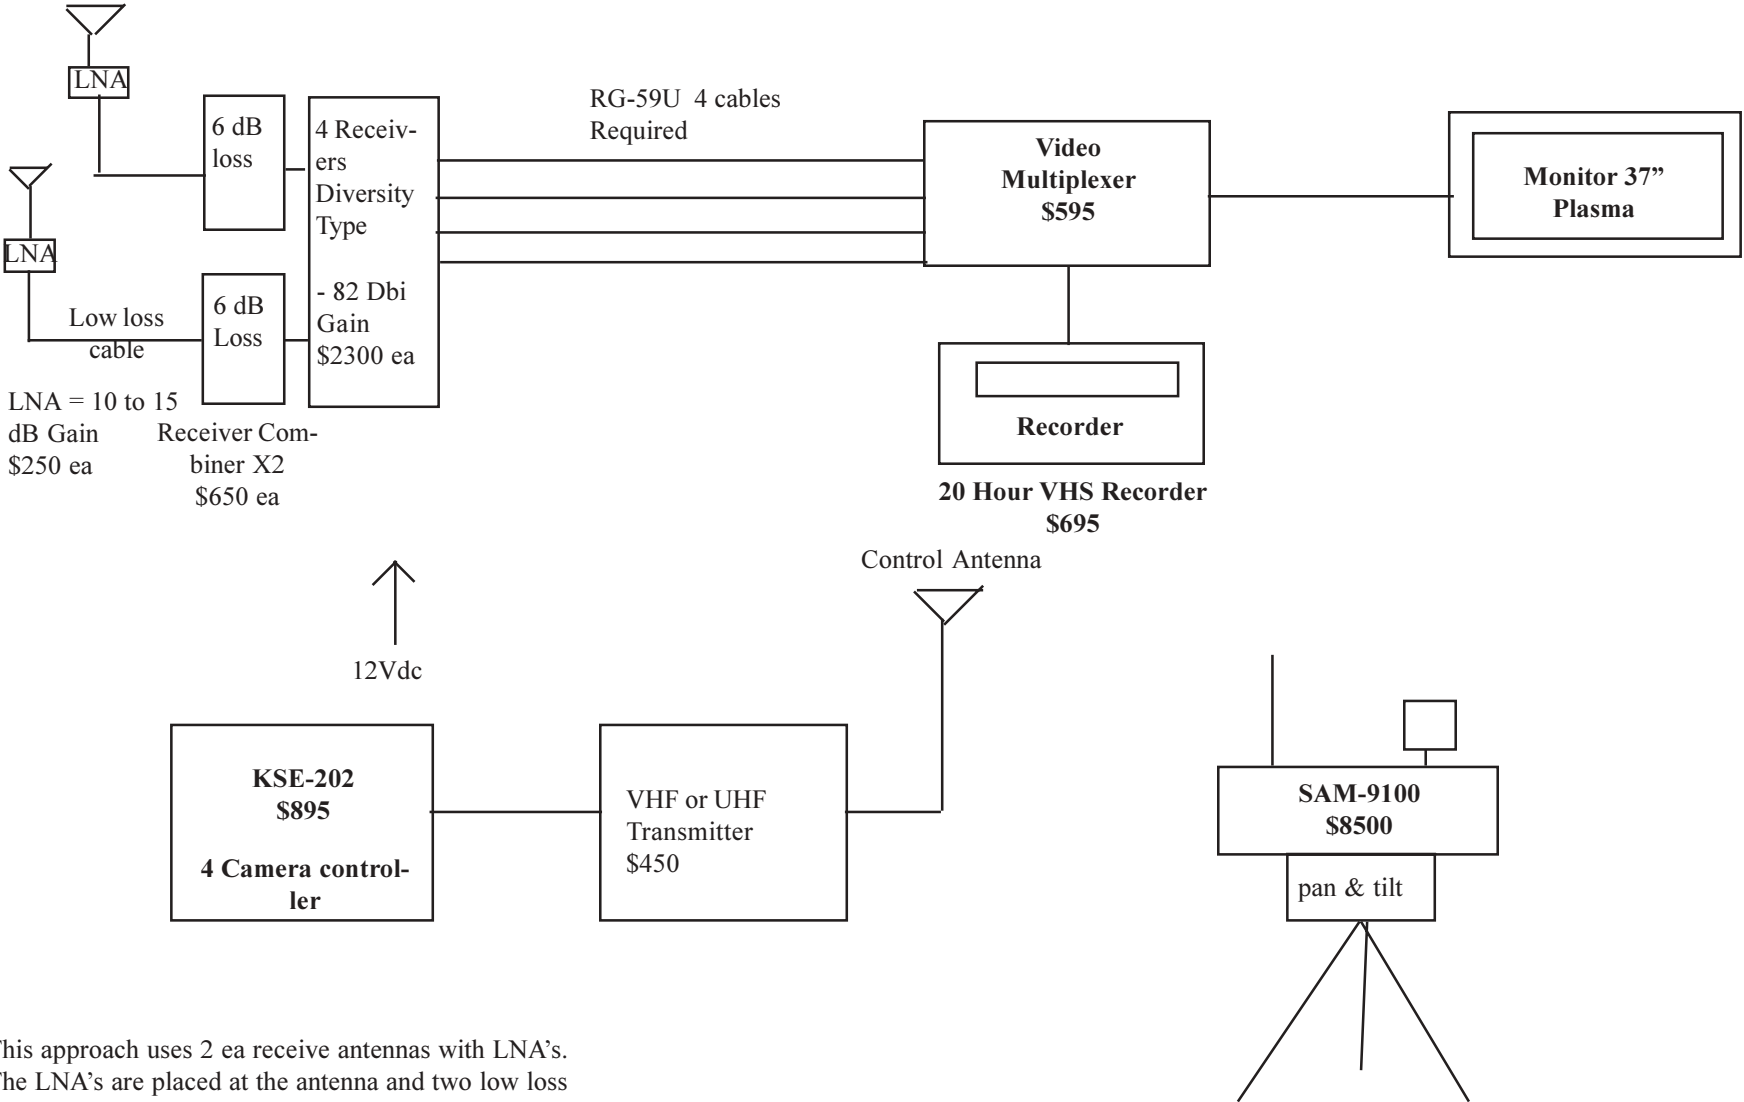

This approach uses 2 ea receive antennas with LNA's. The LNA's are placed at the antenna and two low loss cables are used. The receivers and combiners are placed in the Command Post with all other related equipment.