



SALES INFORMATION & SPECIFICATIONS

Covert-Systems.com


by Ross Associates

Date: 1/2010 - Restrictions: None

**Video
Transmitter
100 - 250 mW
900 to 5900 Mhz**

Video Transmitter (Analog)

Model KST-100 & -250

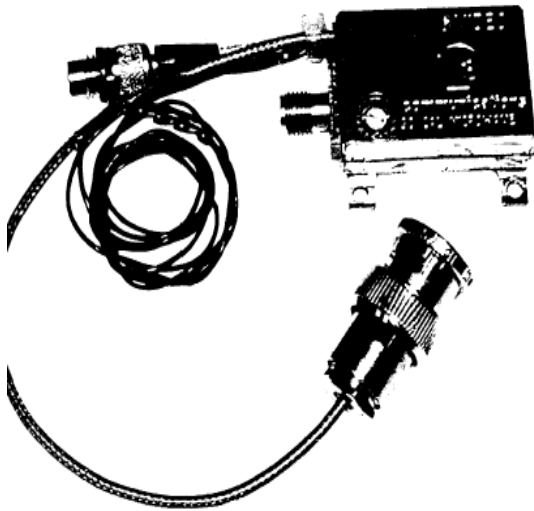

KST-250 \$1550

KST-100 \$950

Features:

- L, S, or C Band Operation
- 100 or 250 mW Output Power
- Up to 48 channels
- NTSC or PAL Color Vvideo
- .41Cubic for Concealment
- Low Current Drain
- 9 - 15 Vdc Operation
- Single Audio Subcarrier

Specifications:

Frequency:	900 to 5900 Mhz
Bandwidth:	700 Mhz
Channels:	Up to 48
Current Drain:	90 Ma - 100 mW 140 Ma - 250 mW 9 to 15 Vdc
Input Voltage:	Any between 4.83 & 8.5
Subcarriers:	Mhz
Size:	.880" x 1.26" x .37"
Temperature:	-20 to +70 C
Weight:	1.27 Oz

Description:

These new miniaturized video transmitters are the smallest in size and most in power-efficient law enforcement transmitters available. Packaged in a rugged, easy to mount, 0.41 cubic inch, 1.27 ounce housing, the small size makes it ideal for all types of concealments. Available in two output power levels, 100 mW or 250 mWatts.

Frequency agile (Multichannel) models will allow up to 48 frequencies to be assigned and selected by small rotary switches located on the top of the transmitter.

The unit comes with one audio subcarrier which can be configured for a microphone or line level audio or data inputs.

©

Visit our web site www.covert-systems.com

12305 E. Triple T Ln, Prescott Valley, AZ 86315 928-759-2121 Fax 928-759-2144 • Email: sales@covert-systems.com